


**LC-R123R4P**

For main and standby power supplies.  
Trickle Design life: 6 – 9 years at 20 °C.

VdS




**Dimensions (mm)**

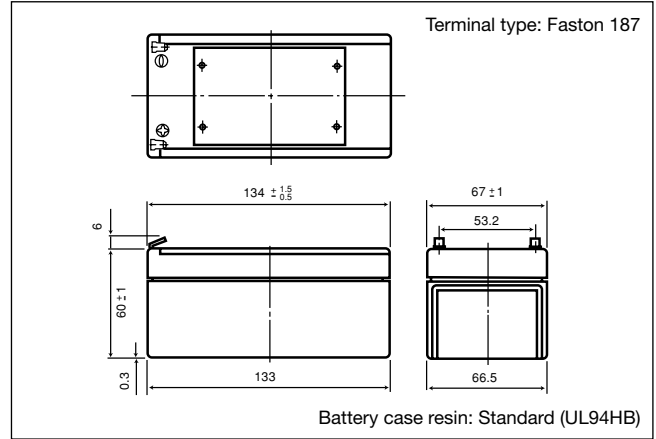

**Specifications**

Nominal voltage		12 V
Rated capacity (20 hour rate)		3.4 Ah
Dimensions	Length	134 mm
	Width	67 mm
	Height	60 mm
	Total Height	66 mm
Approx. mass		1.2 kg

**Discharge characteristics (20 °C) (Note)**

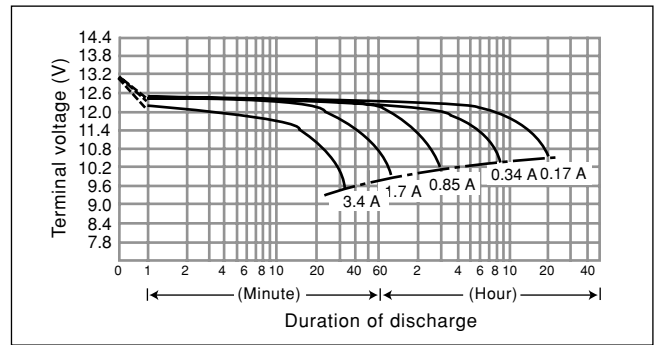

**Characteristics**

Capacity (note) (20 °C)	20 hour rate (170 mA)	3.4 Ah
	10 hour rate (300 mA)	3.0 Ah
Internal resistance	5 hour rate (540 mA)	2.7 Ah
	1 hour rate (2100 mA)	2.1 Ah
	1.5 hour rate discharge Cut-off voltage 10.5 V	1.5 A
Temperature dependency of capacity (20 hour rate)	Fully charged battery (20 °C)	Approx. 60 mΩ
	40 °C	102 %
	20 °C	100 %
	0 °C	85 %
Self discharge (20 °C)	-15 °C	65 %
	Residual capacity after standing 3 months	91 %
	Residual capacity after standing 6 months	83 %
	Residual capacity after standing 12 months	66 %

(Note) The above characteristics data are average values obtained within three charge/discharge cycles, not the minimum values.

**Duration of discharge vs. Discharge current (Note)**

