


TECHNICAL DATA

LITHIUM SULPHUR DIOXIDE G20/2 SERIES

Size (ASA Designation) .. D
 Length 61.0mm
 Diameter..... 33.3mm
 Weight 85g
 Construction..... Hermetically sealed, all welded steel casing, incorporating a safety vent and a glass to metal seal

Voltage Nominal 3.0 volts
 Typical operating Voltage 2.65 – 2.80 volts
 Capacity (1000mA \dots 2.0x).....7.75Ah
 50% capacity achieved at... 10,000mA
 Temperature range..... -50°C + 70°C
 Shelf life at ambient temperature... 10 years
 Self discharge..... Typical 2% p.a.

STANDARD TERMINATIONS (OTHERS AVAILABLE ON REQUEST)

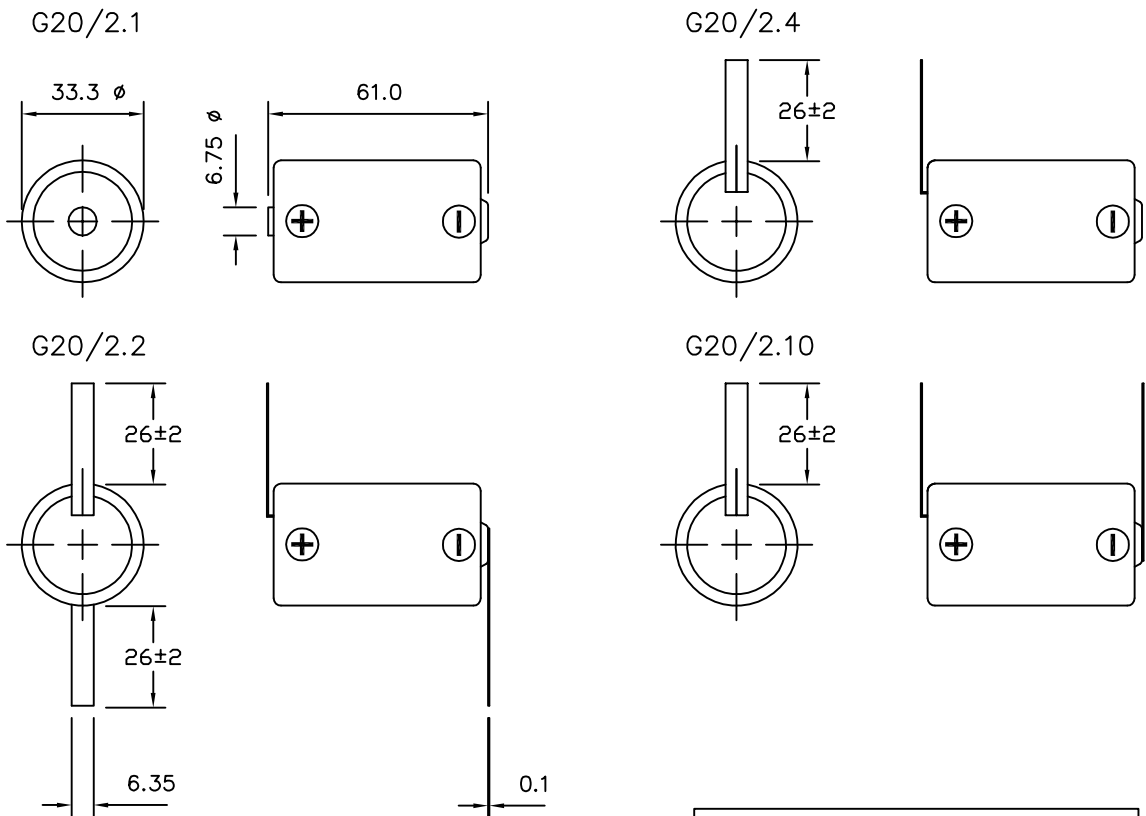

Typical order code example
 G20 / 2 .1
CELL DISCHARGE TERMINATION
SIZE RATING STYLE

