


Data Sheet

Type Number: 6117
Designation IEC: ---
System: Li-Manganese dioxide / Organic Electrolyte
UL Recognition: MH 13654 (N)
Nominal Voltage [V]: 3
Typical Capacity C [mAh]: 2000
 Load 1.0 kOhm, at 20 °C down to 2.0 V

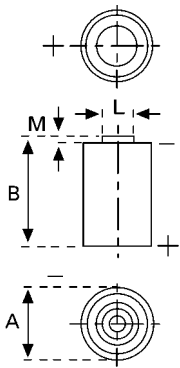

Weight, approx [g]: 21,5
Volume [ccm]: 8,5
Coding: Date of Manufacturing Quarter/Year

Temperature Ranges [°C]:

	min.	max.
Storage:	-55	75
Discharge:	-30	75

Dimensions [mm]:

	min.	max.
Diameter [A]:	14,45	14,75
Height [B]:	49,5	50,5
Shoulder Diameter[L]:	7	
Shoulder Height [M]:	0,6	

Segment: Electronic

Main Applications: Watch
 Photo
 Electronic

Typical Capacities (at 20° C):

Discharge Type:	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w Current [µA]:	1 000	Ω Time:	745 h Capacity [mAh]: 2000 Energy [mWh]: 5600
Discharge Type:	Load	End Voltage:	2.0 V
Continuous 24h/d, 7d/w Current [µA]:	620	Ω Time:	430 h Capacity [mAh]: 1850 Energy [mWh]: 5000