



Product Specification

for Primary Lithium Battery

Model Number: PCL9005

Prepared By	Verified By	Approved By

Primary lithium batteries

3.6V Primary lithium-thionyl chloride (Li-SOCl₂) Energy type 1/2AA -size bobbin cell

Cell size references (1/2UM3 - 1/2R6 - 1/2AA)

Electrical characteristics

(typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity (at 0.5 mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).	1.2Ah
Open circuit voltage (at +20°C)	3.66V
Nominal voltage (at 0.5mA+20°C)	3.6V
Max.Continuous current	50mA
Max.Pulse current	100mA

Pulse capability: Typically up to 100 mA (100 mA/0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 µA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell' s previous history. Fitting the cell with a capacitor may be recommended in severe conditions.

Storage (recommended) (for more severe conditions)	+30°C (+86° F) max
---	---------------------------

Operating temperature range (Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses)	-55°C/+85°C (-76° F/+185° F)
---	--

Physical characteristics

Diameter(max)	14.5mm
Height(max)	25.0mm
Typical weight	10.0g
Available termination suffix	radial tabs, radial pins, axial leads, flying leads (T/AX/P/PT)

Key Features


- Stainless steel container
- High and stable operating voltage
- Superior discharge rate
(less than 1% after 1 year of storage at +20°C)
- Hermetic glass-to-metal sealing
- Compliant with IEC 86-4 safety standard

Main applications

- AMR utility meters
- Memory back-up
- Automotive devices
- Deep hole drilling
- RFID devices
- Electronic toll tags
- GPS emergency locators
- Animal tracking
- Asset/container tracking
- Vehicle tracking
- House arrest systems
- Medical devices
- Wireless security(PIR)
- Oceanographic buoys
- Military electronics
- Industrial instruments

PCL9005

3.6V 1200mAh

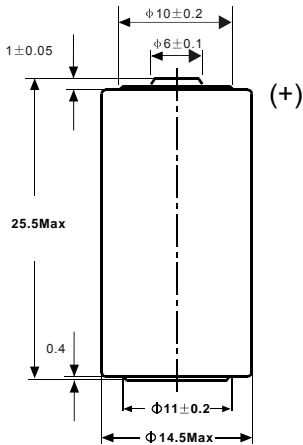

Unit : mm

Storage

The storage area should be clean,
Cool (not exceeding +30°C), dry
And ventilated.

Warning

- Do not use if the battery casing was mangled.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C (212°F), incinerate or expose contents or water.
- Do not solder directly to the cell (use tabbed cell versions instead)

