


Primary Lithium Battery
ER14505M + Epoxy 3,6V 2Ah with cable
PCL9017 3.6V 2Ah

3.6V Primary lithium-thionyl chloride
(Li-SOCl₂) Power Type

For higher drain/pulse term operating applications requesting superior voltage response in -55°C ~+85°C environments

<u>Cell size references</u>	UM3-R6-AA
Alternative models	LST14500
Electrical characteristics	
(Typical values relative to cells stored for one year or less at +30°C max.)	
Nominal capacity	2Ah
<i>(At 1mA +20°C, 2.0V cut off. The capacity restored varies according to current, temperature, cut off)</i>	
Open circuit voltage (At 20°C)	3.66V
Nominal voltage (At 1mA +20°C)	3.6 V
Max. continuous current (at +20°C)	400mA
Typical Max. Pulse current (at +20°C)	800mA
Pulse capability: Typically up to 800mA (800mA/0.1second pulses drained every 2min at 20°C from cells with 20µA base current, yielding voltage readings above 3.0V. The readings may vary according to pulse characteristics, temperature and cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult ACT if necessary)	
Storage (recommended)	+30°C Max
Operating temperature range (High and low temperature will lower the capacity and load voltage.)	-55°C ~+85°C
Physical characteristics	
Diameter(Max)	14.5mm
Height(Max)	50.5mm
Typical weight	19g
Available terminal suffix	radial tabs, radial pins, axial leads, flying leads

PCL9017

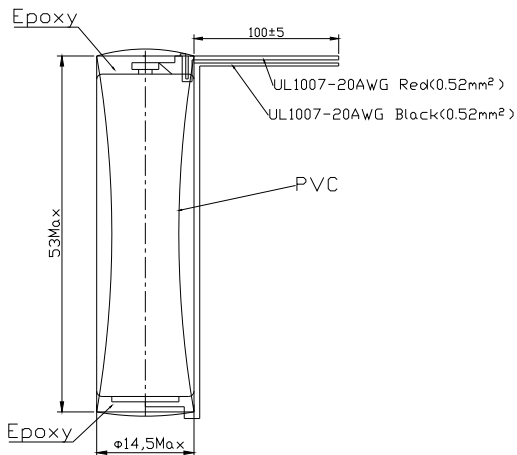

Key features

- >High and stable load voltage
- >Superior drain capacity
- >Low self-discharge rate
(less than 1% after 1 year of storage at 20°C)
- >Stainless steel container
- >Hermetic glass-to-metal sealing
- >Notch technology for safety vent is recommended
- >Non-flammable electrolyte

Main applications

- >Radiocommunication and other military applications
- >Alarms and security systems
- >Beacons and emergency location transmitters
- >GPS equipment
- >Metering systems
- >Sonobouys
- >Led lighting applications
- >Others

Storage

- >Cells should be stored in a clean & dry (less than 70% RH) area
- >Temp. should not exceed +30°C

Warning

- >Do not use if cell casing is mangled
- >Do not use different model of cell in series
- >Soldering the tag should be finished in few seconds
- >Do not try to recharge

