


APPLICATIONS / APPLICATIONS

- VÉHICULES ÉLECTRIQUES **ELECTRIC VEHICLES, ELECTRIC MOBILITY**
- SOLAIRE, ÉOLIEN **SOLAR/WIND ENERGY STORAGE SYSTEM**
- ONDULEUR, SAUVEGARDE **UPS, BACKUP POWER**
- TÉLÉCOMMUNICATION **TELECOMMUNICATION**
- ÉQUIPEMENT MÉDICAL **MEDICAL EQUIPMENT**
- ÉCLAIRAGE **LIGHTING**

CHARGE / DISCHARGE CURVE AT 25°C

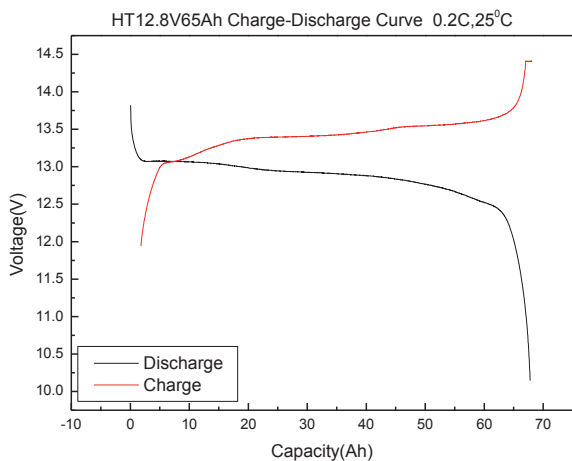

TMD 1 Description, classe : UN 3480 – PILES AU LITHIUM IONIQUE, 9, II, (E)	
ADR : Dangerous	IMDG Dangerous
IATA : Dangerous	Procédure TMD PROC 11 : UN 3480 (Total) -ION



OUTLINE SAFETY WARNING: USE ONLY WITH IN THE ALLOWED PARAMETERS. Do not short circuit or over-load the battery. Charge only using an approved charger designed specifically to charge this battery. Do not heat above maximum temperatures indicated. Never crush, mutilate, puncture or abuse the battery. Do not dismantle the pack or disable any of the protective devices or circuits. DO NOT USE THE BATTERY IF YOU SUSPECT IT MAY BE FAULTY OR DAMAGED.

© Copyright Enix Energies 2005. NB: This document and the product design are the intellectual property of Enix Energies. No document or design may be copied or used for commercial purposes without written permission of Enix Energies. Users must satisfy themselves, by means of testing etc., that products are suitable for their application. Data in this document is for general guidance only; consult cell manufacturers data for definitive information. Information is given free of charge and in good faith, but no responsibility can be accepted for any errors or omission or costs or losses or liabilities arising from the use of this information. All business is conducted to Enix Energies terms and conditions only.