



OPEN LEAD BATTERY

12V-86Ah

NX POWER DEEP CYCLE

OPEN
LEAD
deep cycle

MAIN INFORMATION / INFORMATIONS GÉNÉRALES

BRAND / MARQUE	NX
TECHNOLOGY / TECHNOLOGIE	Open Lead Battery
NOMINAL VOLTAGE / TENSION NOMINALE	12V
NOMINAL CAPACITY / CAPACITÉ NOMINALE	86Ah (100hr)
DIMENSIONS / DIMENSIONS	
• Length / Longueur	275 mm
• Width / Largeur	175 mm
• Height / Hauteur	190 mm
WEIGHT / POIDS	
• Acid included / Avec acide	20.77 kg
• Without acid / Sans acide	16.09 kg
POLARITY / POLARITÉ	- +
TERMINAL / TYPE DE COSSES	Auto
CASING / TYPE DE BAC	L3
COLOR / COULEUR DE BAC	Black top and white case



TECHNICAL INFORMATION / INFORMATIONS TECHNIQUES

CAPACITY / CAPACITÉ	<ul style="list-style-type: none"> • 86Ah C₁₀₀ • 80Ah C₂₀ • 65Ah C₅
GRIDS TECHNOLOGY / COMPOSITION DES GRILLES	Pb - Sb - Se
CYCLING / CYCLAGE	<ul style="list-style-type: none"> • 300 cycles acc. to Standard DIN 43 539 part 3 • 600 cycles acc. to Standard DIN 40 757 • 1200 cycles acc. to Standard DIN 40 767

APPLICATIONS / APPLICATIONS

Leisure (nautical, caravan, camper...) / Loisir (marine, caravane...)

Electric traction (fork lift trucks and electric pallet trucks) / Semi traction (charriots élévateurs, transpalettes...)

Industrial cleaning machines / Engins de nettoyage


Electric vehicles / Véhicules électriques

Lifting apparatus / Engins de levage

Lighting and solar / Energie solaire



AMP1322 CHARGE IN 20H

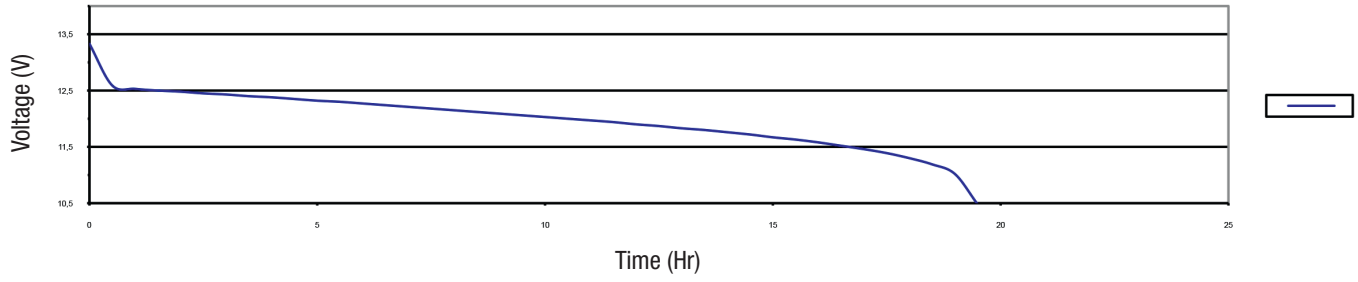

AMP1322 CHARGE IN 5H

