



Yuasa Technical Data Sheet

Yuasa L35-115 - Leisure Batteries

Performance

| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 115Ah |
| Cold Cranking Amps (EN1) | 750A |

Dimensions

| | |
|--------|-------|
| Length | 350mm |
| Width | 174mm |
| Height | 224mm |



Weights & Measures

| | |
|-----------------------|------------|
| Mean Weight with Acid | 25.4kg |
| Dry Weight | - |
| Acid Volume | 4.9 litres |

Container Features

| | |
|---------------------------|-------------------------|
| Case Type | Euro Compact Low Kamina |
| Cell Layout | 1 |
| Hold Down | N |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | - |
| Lid Type | Central Venting |


Technology

| | |
|-------------------------|------------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| VDA Roll Over Test | - |
| Vibration | V1 (30Hz/3g/2hr) |
| Recommended Charge Rate | 6A |


Terminal Type

T1

Standard DIN Post

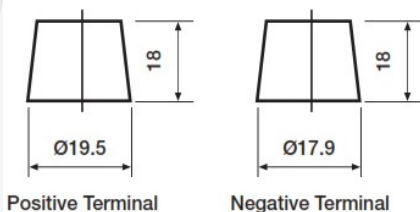

Cell Assembly Layout

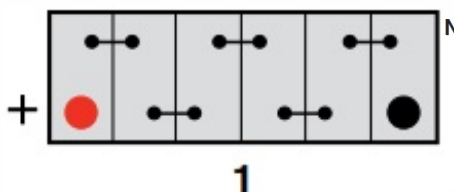

Battery Hold-down



Data Sheet generated on 18/07/2017 - E&OE